



ଜିଲ୍ଲା ଗ୍ରାମ୍ୟ ଉନ୍ନୟନ ସଂସ୍ଥା, କନ୍ଧମାଳ

ପଞ୍ଚାୟତିରାଜ ଓ ପାନୀୟ ଜଳ ବିଭାଗ

ଓଡ଼ିଶା ସରକାର

DISTRICT RURAL DEVELOPMENT AGENCY, KANDHAMAL

Panchayati Raj & Drinking Water Department

Government of Odisha

THROUGH FAX/E-Mail/POST

DRDA, KANDHAMAL
Phulbani-762001

Tel: 06842 (STD Code)
253696 (Off.), 253709 (Res)
255297, 253905 (Fax)
E-mail: ori-dphulbani@nic.in

Tender Call Notice No. 1663 Date: 07/04/2021

1. For and on behalf of Govt. of Odisha the undersigned invites sealed tenders in duplicate super scribing the tender notice No & Date from reputed firms having valid H.T. electrical license issued by ELBO, Bhubaneswar under "DESI Scheme in different Block areas under Kandhamal District for construction, Replacement and Up-gradation Electrification works as mentioned in the Tender schedule on turnkey contract basis.

2. DESI Scheme

Scope of Work	Block/ Package/ Estimate cost	EMD @1% of estimated cost. (In Rs.)	Tender Processing Fees (in Rs.)	Period of Completion
DESI Electrification Works of villages/ Habitations/ Hamlets of the Blocks and Wards/ Slums/ Padas of Municipality/NAC with following works. 1. Upgradation of Existing DTR from 25 KVA to 63 KVA 2. Replacement of 3p4w bare conductor to 3p4w LT AB cable (3x50+1x35) sq.mm. 3. Replacement of 1p2w damaged LT AB cable (1x35+1x25) sq.mm 4. Upgradation of existing DTR from 63KVA to 100 KVA 5. Replacement of damaged AB cable 6. Upgradation of DTR from 10 KVA to 16 KVA	Phulbani+Phiringia Block/ Package No.A/ Rs. 47,56,693/-	47567/-	10,000/-	3 months
	Khajuripada/ Package No.B/ Rs.41,12,596/-	41126/-	10,000/-	03 months
	G.Udayagiri+ Tikabali+Raikia/ Package No.C/ Rs.36,86,767/-	36868/-	10,000/-	03 months
	Balliguda+ K.Nuagaon/ Package No.D/ Rs.1,05,23,874/-	105239/-	20,000/-	03 months
	Daringbadi/ Package No.E/ Rs.98,54,696/-	98547/-	20,000/-	03 months
	Daringbadi/ Package No.F/ Rs.60,55,696/-	60557/-	10,000/-	03 months
	TOTAL	Rs.3,89,90,322/-		

N.B: The above rates/amounts are inclusive of all charges.

3. Period of completion 3 months from the date of issue of Work order.

4. Bid documents consisting of specification, schedule of quantities and set of terms and condition of contract and other necessary documents should be downloaded from the District Website www.kandhamal.nic.in and furnish the same by Regd. Post/Speed Post/Courier to the office of the Project Director, DRDA, Kandhamal, Phulbani with enclosing the EMD and the Tender Processing Fees in demand draft drawn on any Nationalized Bank in favour of Project Director, DRDA, Kandhamal payable at Phulbani. The Tender Processing Fees is not refundable.
5. There shall be 2 stage bidding process- Technical & Commercial. The Technical bid along with the required documents must be placed in a sealed envelope superscripted as "Technical Bid for the Tender on PACKAGE NO.....OFBlock(S) UNDER DESI SCHEME
"The Commercial Bid shall be placed separately in a sealed envelope super scribed as PACKAGE NO.....OFBlock(s) UNDER DESI SCHEME
Those two envelops shall be placed in a third bigger sealed envelope superscripted with "Tender Notice No. & Date for execution of PACKAGE NO.....OFBlock(S) UNDER DESI SCHEME
6. Bids complete in all respect should reach this office through Registered Post/ Speed Post/ Courier on or before 26-04-2021 at 05.00 PM. Late bids shall not be entertained.
7. The technical bids will be opened on dated 27-04-2021 at 11.00 AM in the office of the undersigned in the presence of bidder or their authorized representative who wish to attend.
8. Documents to be submitted with bids:
 - a) Valid Electrical License from ELBO..
 - b) Pan Card
 - c) IT return of last 3 years
 - d) GST Registration Certificate
 - e) GST return of last two years.
 - f) EPF Registration Certificate.
 - g) EMD and Tender processing fee in shape of DD/BD in favour of PD,DRDA, Kandhamal payable at Phulbani.
 - h) Documents in support of experience.
 - i) Affidavit regarding non blacklisting.
9. The bidders are required to quote their rate both in words and figures. The bidders are required to put their signature in every page, without any over writing or any correction made in the bid rate. The rate quoted in figures only without mentioning in words shall be liable for rejection.
10. Less & Excess of the tender value of total work will be calculated as per the rate schedule of OERC, Bhubaneswar.
11. Period of completion of project is 90 days(i.e. 3 months).
12. Other details can be seen in the Office of DRDA.
13. Doubts if any may be clarified from DRDA and EE,PED, Southco Utility, Phulbani (9437765477 & 9437480023)
14. The authority reserves the right to reject any or all the bids without assigning any reason thereof.

TERMS AND CONDITIONS (GENERAL)

Due date:26-04-2021 at 5.00 PM

To be opened on date: **27-04-2021 at 11.00 AM.**

The bidders are requested to submit the tender as per instructions given below.

The Tender should be furnished only in the prescribed form and all the columns are to be entered, failing which the offer will be rejected outright.

The tenders not quoted as per our terms detailed below will be rejected outright.

1. PRICE:

The price quoted should be firm and final. The rate (less of excess) should be entered in figures and words and any correction should be attested under the seals & signature of the Firm.

2. EARNEST MONEY:

- a. 1% of the estimated price should be paid as Earnest money.
- b. Earnest money shall be offered in shape of Bank Demand Draft (From a Nationalized Bank).
- c. Earnest money offered in shape of bank Demand Draft in favour of Project Director, DRDA, Kandhamal payable at Phulbani. Tenders without EMD will be rejected.
- d. Earnest money against previous tender, if any will not be adjusted towards EMD against this tender.
- e. Earnest money will be forfeited if the successful bidder fails to accept the order and/or letter of intent placed in its favour with in the validity period for the full/part quantity of the order.
- f. Earnest money will be refunded to the unsuccessful bidder only after the tender is finally decided. However, if any firm wants refund of earnest money before it is decided may be released to them but its offer will not be considered at the time of finalization of tender.

3. TENDER PAPER/DOCUMENTATION COST:-

- a. The Tender Processing Fees offered in shape of Bank Demand Draft in favour of the Project Director, DRDA, Kandhamal payable at Phulbani as against each package is not refundable. Tenders without Processing Fees will be rejected.

4. SECURITY DEPOSIT :

- a. 5% security deposit from the Gross Bill will be deducted at the time of Bill payment.
- b. The security deposit paid by the successful bidder will be forfeited on cancellation of order due to failure to execute the order in full or in part within the stipulated period if the materials and workmanship are not as per the approved quality.
- c. The Security Deposit will be released only after satisfactory execution of the order & completion of guarantee period i.e. one year.

5. DOCUMENTS TO BE SUBMITTED WITH BIDS (Self attested Xerox copy)

- a)Valid Electrical License from ELBO.
- b)PAN Card.
- c)I.T Returns of last 3 years.
- d)GST Registration Certificate.
- e)GST returns of last two years.
- f)EPF Registration Certificate.



g) EMD and Tender processing fee in shape of DD/BD in favour of PD, DRDA, Kandhamal payable at Phulbani.

h) Documents in support of experience.

i) Affidavit regarding non blacklisting.

6. **TERMS OF PAYMENT:**

Payment shall be made after receipt of materials and execution of works and verification thereof.

7. **PENALTY:**

Penalty @1/2% per week up to a maximum of 5% of the total value of the purchase/work order will be imposed, if the work is delayed beyond schedule time for completion, without assigning the reason of delay.

8. **FORCE MEASURE CONDITION:**

The contract shall not be liable for any penalty for delay or failure to perform the contract for reasons of force measure such as acts of God, acts of public enemy. Acts of Govt., Fire, flood, epidemics, quarantine, restrictions strict, freights, embargo's and provided that the contract shall within 10 days from the beginning of such delay notify the purchaser in writing the cause of delay, the purchase shall verify the facts and grant such extensions as facts justify.

9. **GURANTEE:**

The work should be guaranteed for satisfaction operation and trouble free service for a period of 12 months from the date of commissioning. Any defect noticed during this period shall be made good by the supplier free of cost provided such defects are attributed to faulty design, workmanship and bad materials used. In case of star rated transformer the Guarantee Period is 2 years or more.

10. **MATERIALS AND WORKMANSHIP:**

The materials should confirm to the latest I.S specifications (Transformer of BIS Energy Level-II) and the workmanship should be of the best quality. The authorised dealership certificate, if any should be furnished along with tender.

11. The DESI scope has been furnished as per field requirement and scope of work provided by SOUTHCO field Engineers, which was approved in DEC meeting. Any deviation occurs during execution of actual work, the agency/contractor must be approved the same by the competent authority before execution of work.

12. All the major materials i.e. PSC pole, Conductor, AB Cable, Transformer etc should be inspected at Factory premises by any Third Party Inspecting Agency (TPIA) before dispatching to field for ensuring the quality of materials.

13. The Single Phase Energy Meter should be procured from the SOUTHCO Approved Vender and meter needs to be tested at SOUTHCO Laboratory.



14. (a) Major materials i.e. (Transformer, All type of poles, Conductors, Cables, Lightning arrester, Isolator, AB switch, HG Fuse and Insulators etc) GTP shall be approved at circle level prior to procurement.

(b) SOUTHCO representatives will inspect the above major materials procure by the firm at the factory premises and other materials at contractor's stores/worksite.

(c) All materials should confirm IS/BIS/REC standard and should have type test report within five years.

(d) All the works should be carried out as per CEA (Measures relating to safety and electric supply) regulation 2010 and CEA (Technical standard for construction of electrical plants and electric Lines) Regulation 2010.

15. TEST CERTIFICATE:

The test certificate from the manufacturers shall be furnished for scrutiny and approval well in advance of despatch of materials.

16. INSPECTION:

The Authorised Inspecting Officer after certifying the work, it will be treated as completed.

17. ACCEPTANCE:

The successful Bidder on receipt of the purchase order/letter of intent should intimate its acceptance with in 7 (seven) days of receipt of order, failing which the order will be automatically cancelled with forfeiture of earnest money deposit as applicable.


18. CANCELLATION OF THE TENDER:

Undersigned reserves the right to alter the tender quantity and reject / accept any or all tender or split the tender among the bidders without assigning any reason thereof.

19. JURDICTION OF THE COURT OF ODISHA:

Suits if any, rising out of the contract shall be filed by either party in any court of Law to which the jurisdiction of the High Court of Odisha extends. The Bidder who does not adhere to these clauses will be rejected.

20. The bidders are required to put their signature in every page under the seals & signature of the Firm.


Project Director,
DRDA, Kandhamal
**Project Director
D.R.D.A, Kandhamal**

MANDATORY FORMAT

TENDER CALL NOTICE NO./DATE:-

Name of the Work: for System Improvement Electrification Works/ Rural Electrification Works of Villages/ Habitations/Hamlets under DESI SCHEME for the year 2018-19

(1)DESI for Package No.: _____ of BLOCK.....in
Kandhamal District.

Name & Address of the Firm/Agency:-

Sl.	Particulars	
1	Name of the Block Applied	
	Package No.	
2	ELBO License No./Validity up to	
3	Tender Processing Fees	
4	Bank Name:	
5	DD.No.	
6	Date	
7	EMD Amount	Rs.
8	Bank Name:	
9	DD.No.	
10	Date	
11	Experience documents(proof of execution of works of Rs.1.00 crore or above) (copy of work order& performance certificate, Final Inspection certificate issuing by Electrical Inspector.	
12	GST Registration Certificate & latest return.(Yes/No)	
13	IT Return of last 3 years (Yes/No)	
14	PAN No.	
15	EPFO Registration Certificate No./Date	
16	Affidavit towards non-blacklisting(yes/no)	

Signature of the head of the Firm/Agency.



DECLARATION FORM

TENDER NOTICE NO.....

NAME OF THE BLOCK.....

PACKAGE NO.....

To

The Collector & District Magistrate,
Kandhamal, Phulbani-762001

Sir/Madam,

- (1) Having examined the above specification together with Tender conditions referred to therein, I /We the undersigned hereby offer to supply the materials and execute the work covered thereon complete in all respects as per the specification and general condition at the rate entered in the attached contract schedule in price in the Tender.
- (2) I/We hereby undertake to have the materials delivered and execute the work within the time specified in the tender.
- (3) I/We hereby guarantee the technical particulars given in the tender supported with necessary test reports from concerned authorities.
- (4) In the even to issue of work order being decided in my/our favour, I/We agreed to deduct the 5% Security Deposit at the time of payment of work bill.

Signed this day of

Yours faithfully,

Signature with Designation and seal of Firm.

N.B.:- This form should be duly filled in by the bidder and submitted along with the original copy of tender.



E:\New folder\Data on HCL-3\HCL 3\UKU-2021\BGJY-2021\BGJY-2020\DESI TENDER-20-21\TENDER DESI-Doc & letters -05-02-2021.docx

PRICE/COMMERCIAL BID FOR DESI WORKS

RATE QUOTED FORM

TENDER CALL NOTICE NO.:.....DATED.....

NAME OF THE WORK: (3)DESI for **Package No.:A (Phulbani + Phiringia)**

NAME OF THE AGENCY:-.....

Sl.	Description of Work/Material	Unit	Quantity	Govt. Rate in Rs.	Unit Rate Quoted by the Executing Agency	
					Figures	Words
PACKAGE-A (Phulbani+Phiringia)						
1	Up Gradation of existing DTR capacity from 25 KVA to 63 KVA	No.	1	86500.00		
2	Up Gradation of existing DTR capacity from 63 KVA to 100 KVA	No.	1	117000.00		
3	3 .1/2 core x 95 mm.sq. LT PVC cable @15 Mtr/each 63 KVA	Mtr	1	333.00		
4	3 1/2 core x 150 mm.sq. LT PVC cable @15 Mtr/each 100 KVA	Mtr	1	504.00		
5	Replacement of damaged AB cable of size 3x35+1x25 mm.sq.	Km	1	108000.00		
6	Replacement of 3p4w LT line bare conductor with 3x50+1x35 AB cable	Km	1	130000.00		
7	LT dead end clamp with I hook	No.	1	377.00		
8	LT Suspension clamp with I hook	No.	1	401.00		
9	Piercing connector	No.	1	56.00		
10	Neutral connector	No.	1	32.00		
TOTAL				443203.00		

Total rate offered by the executing agency for Rs.....
(Rupees..... Only

NB: The above unit rates/ amount are exclusive of all charges

[Handwritten Signature]
Executive Engineer
P.E.D. Phulbani

Seal & Signature of Executing Agency/Firm

PRICE/COMMERCIAL BID FOR **DESI WORKS**

RATE QUOTED FORM

TENDER CALL NOTICE NO.:.....DATED.....

NAME OF THE WORK: (3)DESI for **Package No.:B (Khajuripada)**

NAME OF THE AGENCY:-.....

Sl.	Description of Work/Material	Unit	Quantity	Govt.Rate in Rs.	Unit Rate Quoted by the Executing Agency	
					Figures	Words
PACKAGE-B (Khajuripada)						
1	Up Gradation of existing DTR capacity from 25 KVA to 63 KVA	No.	1	86500.00	✓	
2	Up Gradation of existing DTR capacity from 63 KVA to 100 KVA	No.	1	117000.00	✓	
3	3 .1/2 core x 95 mm.sq. LT PVC cable @15 Mtr/each 63 KVA	Mtr	1	333.00	✓	
4	3 1/2 core x 150 mm.sq. LT PVC cable @15 Mtr/each 100 KVA	Mtr	1	504.00	✓	
5	Replacement of damaged AB cable of size 1x35+1x25 mm.sq.	Km	1	42000.00	✓	
6	Replacement of 3p4w LT line bare conductor with 3x50+1x35 AB cable	Km	1	130000.00	✓	
7	LT dead end clamp with I hook	No.	1	377.00	✓	
8	LT Suspension clamp with I hook	No.	1	401.00	✓	
9	Piercing connector	No.	1	56.00	✓	
10	Neutral connector	No.	1	32.00	✓	
TOTAL				377203.00		

Total rate offered by the executing agency for Rs.....
(Rupees..... Only

NB: The above unit rates/ amount are exclusive of all charges

[Handwritten Signature]
Executive Engineer
B.E.D. Phulbani

Seal & Signature of Executing Agency/Firm

PRICE/COMMERCIAL BID FOR DESI WORKS

RATE QUOTED FORM

TENDER CALL NOTICE NO.:.....DATED.....

NAME OF THE WORK: (3)DESI for **Package No.:C (G.Udayagiri+Tikabali+Raikia)**

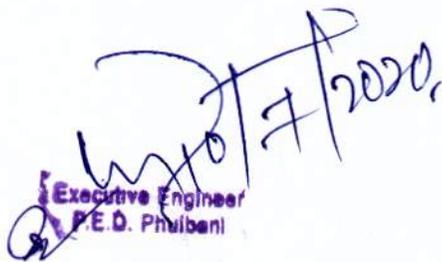
NAME OF THE AGENCY:-.....

Sl.	Description of Work/Material	Unit	Quantity	Govt.Rate in Rs.	Unit Rate Quoted by the Executing Agency	
					Figures	Words
PACKAGE-C (G.Udayagiri+Tikabali+Raikia)						
1	Up Gradation of existing DTR capacity from 25 KVA to 63 KVA	No.	1	86500.00	✓	
2	Up Gradation of existing DTR capacity from 63 KVA to 100 KVA	No.	1	117000.00	✓	
3	3 .1/2 core x 95 mm.sq. LT PVC cable @15 Mtr/each 63 KVA	Mtr	1	333.00	✓	
4	3 1/2 core x 150 mm.sq. LT PVC cable @15 Mtr/each 100 KVA	Mtr	1	504.00	✓	
TOTAL				204337.00		

Total rate offered by the executing agency for Rs.....
(Rupees Only

NB: The above unit rates/ amount are exclusive of all charges

Seal & Signature of Executing Agency/Firm


Executive Engineer
P.E.D. Phulbani

PRICE/COMMERCIAL BID FOR DESI WORKS

RATE QUOTED FORM

TENDER CALL NOTICE NO.: DATED.....

NAME OF THE WORK: (3)DESI for **Package No.:D (Balliguda+K.Nuagaon)**

NAME OF THE AGENCY:-.....

Sl.	Description of Work/Material	Unit	Quantity	Govt.Rate in Rs.	Unit Rate Quoted by the Executing Agency	
					Figures	Words
PACKAGE-D (Balliguda+K.Nuagaon)						
1	Up Gradation of existing DTR capacity from 25 KVA to 63 KVA	No.	1	86500.00	✓	
2	Up Gradation of existing DTR capacity from 63 KVA to 100 KVA	No.	1	117000.00	✓	
3	3 .1/2 core x 95 mm.sq. LT PVC cable @15 Mtr/each 63 KVA	Mtr	1	333.00	✓	
4	3 1/2 core x 150 mm.sq. LT PVC cable @15 Mtr/each 100 KVA	Mtr	1	504.00	✓	
5	Replacement of damaged AB cable of size 3x35+1x25 mm.sq.	Km	1	108000.00	✓	
6	Replacement of 3p4w LT line bare conductor with 3x35+1x25 AB cable	Km	1	108000.00	✓	
7	LT dead end clamp with I hook	No.	1	377.00	✓	
8	LT Suspension clamp with I hook	No.	1	401.00	✓	
9	Piercing connector	No.	1	56.00	✓	
10	Neutral connector	No.	1	32.00	✓	
11	Up-gradation of existing DTR capacity from 10 KVA to 16 KVA	No.	1	51117.00	✓	
12	35mm.sq. LT PVC cable @15 Mtr/each 16 KVA	Mtr	1	152.00	✓	
TOTAL				472472.00		

Total rate offered by the executing agency for Rs.....
(Rupees Only

NB: The above unit rates/ amount are exclusive of all charges

[Handwritten Signature]
Executive Engineer
P.E.D. Phulbari

Seal & Signature of Executing Agency/Firm

12

PRICE/COMMERCIAL BID FOR **DESI WORKS**

RATE QUOTED FORM

TENDER CALL NOTICE NO.: DATED.....

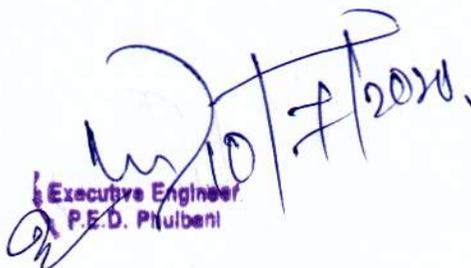
NAME OF THE WORK: (3)DESI for **Package No.: E (Daringbadi)**

NAME OF THE AGENCY:-.....

Sl.	Description of Work/Material	Unit	Quantity	Govt.Rate in Rs.	Unit Rate Quoted by the Executing Agency	
					Figures	Words
PACKAGE-E (Daringbadi)						
1	Up Gradation of existing DTR capacity from 25 KVA to 63 KVA	No.	1	86500.00		
2	Up Gradation of existing DTR capacity from 63 KVA to 100 KVA	No.	1	117000.00		
3	3 .1/2 core x 95 mm.sq. LT PVC cable @15 Mtr/each 63 KVA	Mtr	1	333.00		
4	3 1/2 core x 150 mm.sq. LT PVC cable @15 Mtr/each 100 KVA	Mtr	1	504.00		
5	Replacement of damaged AB cable of size 3x35+1x25 mm.sq.	Km	1	108000.00		
6	Replacement of 3p4w LT line bare conductor with 3x35+1x25 AB cable	Km	1	108000.00		
7	Up-gradation of existing DTR capacity from 10 KVA to 16 KVA	No.	1	51117.00		
8	35mm.sq. LT PVC cable @15 Mtr/each 16 KVA	Mtr	1	152.00		
TOTAL				471606.00		

Total rate offered by the executing agency for Rs.....
(Rupees Only

NB: The above unit rates/ amount are exclusive of all charges


Executive Engineer
P.E.D. Phulbani

Seal & Signature of Executing Agency/Firm

PRICE/COMMERCIAL BID FOR DESI WORKS

RATE QUOTED FORM

TENDER CALL NOTICE NO.: DATED.....

NAME OF THE WORK: (3)DESI for **Package No.:F (Tumudibandh+Kotagarh)**

NAME OF THE AGENCY:-.....

Sl.	Description of Work/Material	Unit	Quantity	Govt.Rate in Rs.	Unit Rate Quoted by the Executing Agency	
					Figures	Words
	PACKAGE-F (Tumudibandh+Kotagarh)					
1	Up Gradation of existing DTR capacity from 25 KVA to 63 KVA	No.	1	86500.00		
2	Up Gradation of existing DTR capacity from 63 KVA to 100 KVA	No.	1	117000.00		
3	3 .1/2 core x 95 mm.sq. LT PVC cable @15 Mtr/each 63 KVA	Mtr	1	333.00		
4	3 1/2 core x 150 mm.sq. LT PVC cable @15 Mtr/each 100 KVA	Mtr	1	504.00		
5	Replacement of damaged AB cable of size 3x35+1x25 mm.sq.	Km	1	108000.00		
6	Replacement of 3p4w LT line bare conductor with 3x35+1x25 AB cable	Km	1	108000.00		
7	LT dead end clamp with I hook	No.	1	377.00		
8	LT Suspension clamp with I hook	No.	1	401.00		
9	Piercing connector	No.	1	56.00		
10	Neutral connector	No.	1	32.00		
11	Up-gradation of existing DTR capacity from 10 KVA to 16 KVA	No.	1	51117.00		
12	35mm.sq. LT PVC cable @15 Mtr/each 16 KVA	Mtr	1	152.00		
	TOTAL			472472.00		

Total rate offered by the executing agency for Rs.....
(Rupees Only

NB: The above unit rates/ amount are exclusive of all charges

[Handwritten Signature]
Executive Engineer
P.E.D. Phulbani

Seal & Signature of Executing Agency/Firm

4

DESI

Sl. No	Name of the Block	Name of the Work	Scope of work	Total Estimated cost(In Rs.)
Package-A				
1	Phulbani	Up-gradation of Existing DTR capacity at different locations of Phulbani Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-03 nos.	399252.00
		Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.	Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50+1x35)sqmm.-6.5 Km	1843959.00
2	Phiringia	Up-gradation of Existing DTR capacity at different locations of Phiringia Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-10 nos.	1330839.00
		Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.	Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50+1x35)sqmm.-3.5 Km	1182650.00
			TOTAL	4756700.00
Package-B				
3	Khajuripada	Up-gradation of Existing DTR capacity at different locations of Khajuripada Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-03 nos.	931587.00
		Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.	Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.-11.8 Km.	3181009.00
		Replacement of 1P-2W damaged AB cable	Replacement of 1P-2W damaged AB cable (1x35+1x25)sqmm.-3.1 Km.	
			TOTAL	4112596.00
Package-C				
4	Raikia	Up-gradation of Existing DTR capacity at different locations of Raikia Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-03 nos.	1305378.00
			Up-gradation of Existing DTR from 63KVA to 100 KVA-05 nos.	
5	G.Udayagiri	Up-gradation of Existing DTR capacity at different locations of G.Udayagiri Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-03 nos.	1486603.00
			Up-gradation of Existing DTR from 63KVA to 100 KVA-06 nos.	
6	Tikabali	Up-gradation of Existing DTR capacity at different locations of Tikabali Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-04 nos.	894786.00
			Up-gradation of Existing DTR from 63KVA to 100 KVA-02 nos.	
			TOTAL	3686767.00

Package-D				
7	Balliguda & K.Nuagaon	Up-gradation of Existing DTR capacity at different locations of Balliguda and K.Nuagaon Blocks	Up-gradation of Existing DTR from 25KVA to 63 KVA-25 nos.	3508323.00
			Up-gradation of Existing DTR from 63KVA to 100 KVA-01 no.	
		Replacement of damaged AB Cable	Replacement of damaged AB Cable-13 Km.	5462970.82
		Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.	Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.-15.8 Km.	
		Up-gradation of existing DTR capacity from 10 KVA to 16 KVA under Balliguda and K.Nuagaon Blocks (Burnt-8 nos.+ Over loaded-12 nos. with using DTR+Breaker Joist pole and 35mm.sq. LT PVC cable @15 mtr/each 16 KVA (20 nos.)	Up-gradation of existing DTR capacity from 10 KVA to 16 KVA under Balliguda and K.Nuagaon Blocks (Burnt-8 nos.+ Over loaded-12 nos. with using DTR+Breaker Joist pole and 35mm.sq. LT PVC cable @15 mtr/each 16 KVA (20 nos.)	1552580.00
			TOTAL	10523873.82
Package-E				
8	Daringbadi	Up-gradation of Existing DTR capacity at different locations of Daringbadi Block	Up-gradation of Existing DTR from 25KVA to 63 KVA-26 nos.	4003859.00
			Up-gradation of Existing DTR from 63KVA to 100 KVA-03 nos.	
		Replacement of damaged AB Cable	Replacement of damaged AB Cable-6.3 Km.	3366708.75
		Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.	Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.-10.1 Km.	
		Up-gradation of existing DTR capacity from 10 KVA to 16 KVA under Daringbadi Block (Burnt-19 nos.+ Over loaded-13 nos. with using DTR+Breaker Joist pole and 35mm.sq. LT PVC cable @15 mtr/each 16 KVA (32 nos.)	Up-gradation of existing DTR capacity from 10 KVA to 16 KVA under Daringbadi Block (Burnt-19 nos.+ Over loaded-13 nos. with using DTR+Breaker Joist pole and 35mm.sq. LT PVC cable @15 mtr/each 16 KVA (32 nos.)	2484128.00
			TOTAL	9854695.75

	Package-F			
9	Tumudibandh & Kotagarh	Up-gradation of Existing DTR capacity at different locations of Tumudibandh & Kotagr Blocks	Up-gradation of Existing DTR from 25KVA to 63 KVA-13 nos.	2454993.00
			Up-gradation of Existing DTR from 63KVA to 100 KVA-04 nos.	
		Replacement of damaged AB Cable	Replacement of damaged AB Cable-4.56 Km.	1970493.84
		Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.	Replacement of 3P-4W bare conductor to 3P-4W LT AB cable (3x50=1x35) sqmm.-3.96 Km.	
		Up-gradation of existing DTR capacity from 10 KVA to 16 KVA under Tumudibandh & Kotagarh Blocks (Burnt-13 nos.+ Over loaded-08 nos. with using DTR+Breaker Joist pole and 35mm.sq. LT PVC cable @15 mtr/each 16 KVA (21 nos.)	Up-gradation of existing DTR capacity from 10 KVA to 16 KVA under Tumudibandh & Kotagarh Blocks (Burnt-13 nos.+ Over loaded-08 nos. with using DTR+Breaker Joist pole and 35mm.sq. LT PVC cable @15 mtr/each 16 KVA (21 nos.)	1630209.00
			TOTAL	6055695.84
			GRAND TOTAL	38990328.41

