

The Panchayat Samiti, Daringbadi on behalf of Govt. of Odisha invites percentage rate bids to be received in the Office of the under signed for the works given below. The details of bid documents will be available in the [www. Kandhamal.nic.in](http://www.Kandhamal.nic.in) website and also in the office of the Block Development Officer, Daringbadi from 7:00 AM to 1:00PM on date from 01.05.2021 to 25.05.2021. Bid documents shall be dropped in the tender Box placed in the Office chamber of Block Development Officer, Daringbadi on or before 1:00PM of Date. 25.05.2021 and shall opened at 2:00PM of Date 25.05.2021 in the office of the Panchayat Samiti, Daringbadi. Further details can be seen from the website [www. Kandhamal.nic.in](http://www.Kandhamal.nic.in).

SL No	Name of the works	Name of the Tendering Authority	Value of works	Bid Security in Rs.	Tender Paper Cost	Class of Contractor	Period of completion
1	2	3	4	5	6	7	8
1	Construction of Sub-Centre Building Kattingia-2 under Daringbadi Block	B.D.O, Daringbadi	Rs.16,31,789/-	Rs.16,320/-	Rs.6000/-	D-Class	06 Months
2	Construction of Sub- Centre Building Daringbadi under Daringbadi Block	B.D.O, Daringbadi	Rs.16,79,055/-	Rs.16,790/-	Rs.6000/-	D-Class	06 Months
3	Construction of Labour Room Building at PHC (N) Bamunigam under Daringbadi Block	B.D.O, Daringbadi	Rs.23,40,216/-	Rs.23,400/-	Rs.6000/-	C-Class	06 Months
4	Construction of Labour Room Building at PHC (N) Budaguda under Daringbadi Block	B.D.O, Daringbadi	Rs.23,40,216/-	Rs.23,400/-	Rs.6000/-	C-Class	06 Months
5	Construction of CDPO New Office Building at Daringbadi	B.D.O, Daringbadi	Rs.21,25,393/-	Rs.21,250/-	Rs.6000/-	C-Class	06 Months


Block Development Officer
Daringbadi

Memo No. 1467 /Date. 28/04/2021,

Copy forwarded to the Editor DHARITRI ,BBSR / PRAMEYEA ,BBSR/ SAMBAD ,BBSR for information with a request to get it published in the shortest space possible at an early date before 30.04.2021 under Rs. 10,000/- for wide circulation of Tender call notice. The complimentary copy of the news paper containing Tender call notice may be sent to this Office for reference & record.


Block Development Officer
Daringbadi

Memo No. 1468 /Date. 28/04/2021 /

Copy Submitted to the Collector & District Magistrate, Kandhamal, Phulbani for favour of kind information.


Block Development Officer
Daringbadi

Memo NO. 1469 / Date. 28/4/2021 /

Copy to the Project Director, DRDA, Kandhamal/ Sub-Collector ,Balliguda/ Sub- Collector ,Phulbani/ Executive Engineer R&B/ RWSS/ MI/RD ,Balliguda & Phulbani/ DSWO, Kandhamal/ Chief District Medical and PHO, Kandhamal/ CDPO, Daringbadi/ DI & PRO, Phulbani for information & wide circulation with a request to display the Tender call notice in their notice Board.

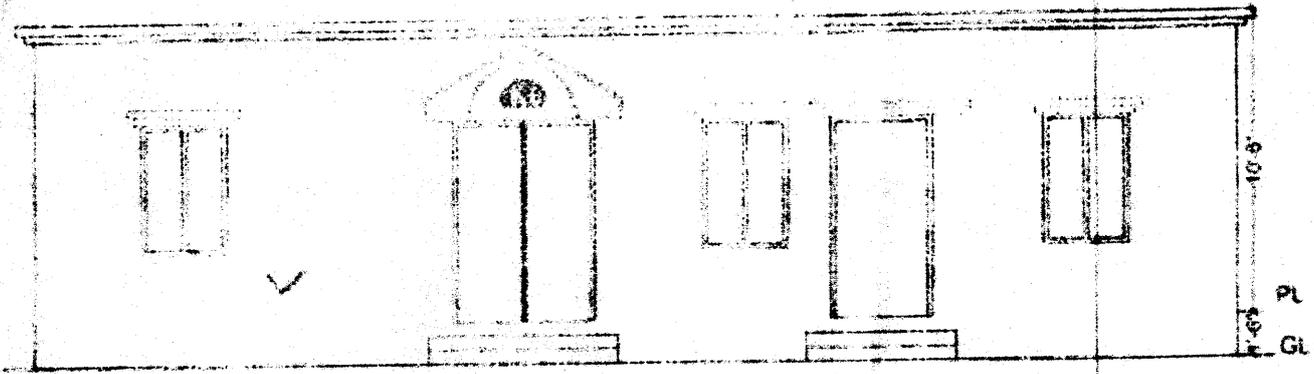

Block Development Officer
Daringbadi

Memo No. 1470 / Date. 28/04/2021 /

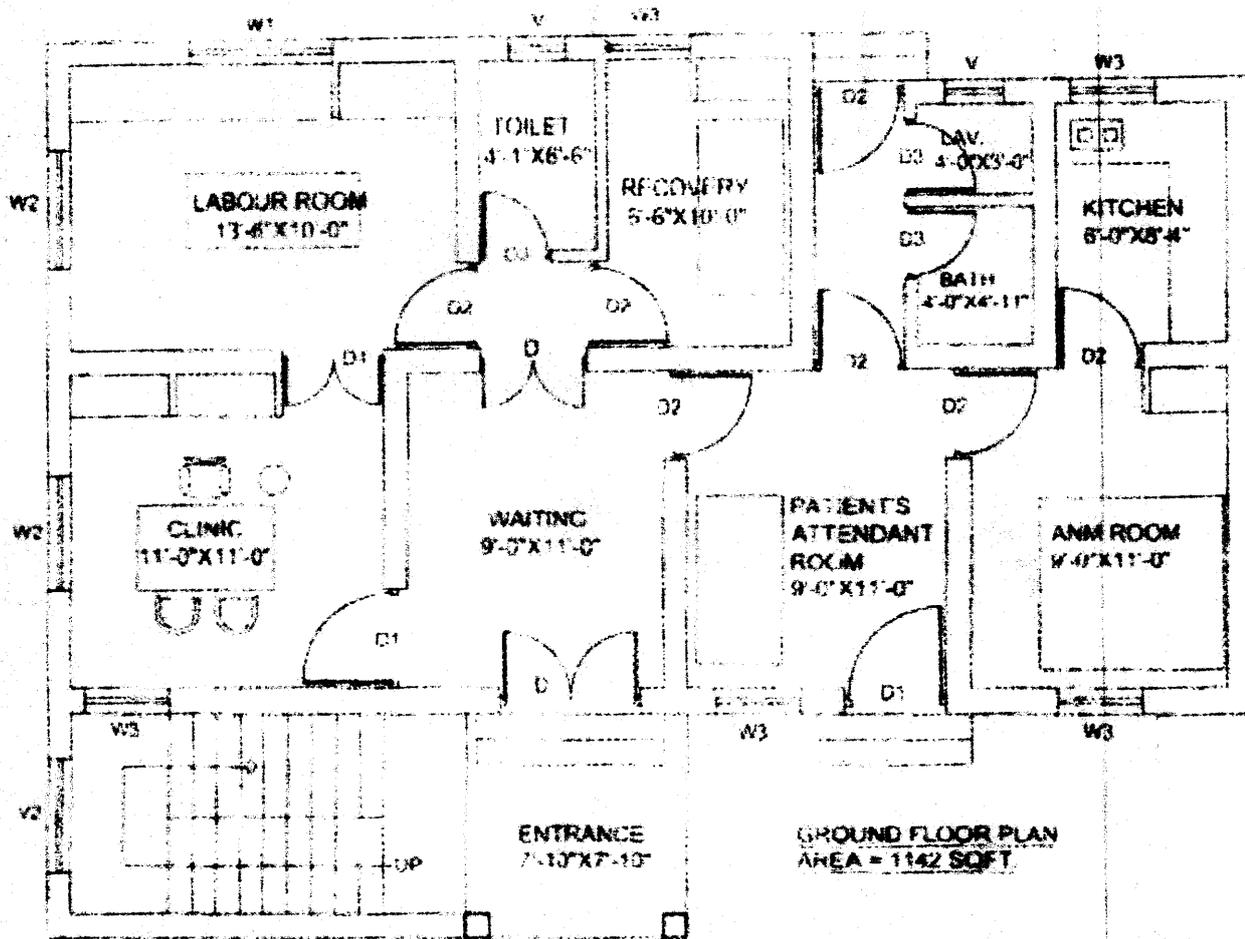
Copy forwarded to the DIO, NIC, Kandhamal for information & necessary action. He is requested to publish the Tender call notice with Plan and Specifications (Approved Tender Scheduled) on Govt. website for wide publicity before 30.04.2021.


Block Development Officer
Daringbadi

PLAN OF SUBCENTRE



FRONT ELEVATION



DRG. TITLE :

ARCHITECTURAL PLAN, ELEVATION & LAYOUT PLAN OF SUBCENTRE.

Dhu
B
25/11/2020

SCHEDULE OF DOORS AND WINDOWS

TYPE	SIZE	DESCRIPTION
D	5'-0" x 7'-0"	MS Grill
D	3'-9" x 7'-0"	Panelled door
D1	3'-6" x 7'-0"	-do-
D2	3'-0" x 7'-0"	-do-
D3	2'-6" x 7'-0"	PVC Door
W1	5'-0" x 4'-6"	MS Window shutter
W2	4'-0" x 4'-6"	-do-
W3	3'-0" x 4'-6"	-do-
V	2'-0" x 2'-6"	Fully glazed top hung ventilator

TENDER SCHEDULE

1. Name of the Work:- Construction of Sub Centre Building Daringbadi under Daringbadi Block for the Year-2020-21

2. Estimated cost with GST:- Rs.20,00,000/-

3. Tender Amount without GST:- Rs.16,79,055/-

SL No.	Description work	Unit	Qty	Rate (Rs)		Amount
				In figure	In words	
1	2	3	4	5	6	7
1	Earthwork in excavation of foundation & plinth in hard soil mixed with gravels including dressing and levelling the bed up to the required depth & removing the excavated earth & depositing the same away from the work site within initial lead of 50mtr & initial lift of 1.5 mtr, including cost of labour T&P, workers welfare, cess article required for the work including shoring, shuttering propping & dewatering if required, etc. complete in all respect as per the specification & direction of the Engineer-in-Charge.	Per 1 Cum	65.24	181.84	Rupees one Hundred Eighty one & paise eighty four only	11864.00
2	Supplying and filling foundation trenches and plinth, ditches with sand well watered and rammed in layers not exceed 23.5cm(9") in depth with all lead and lift including cost, conveyance, loading, unloading, royalties and taxes of all materials, cost of all labour, sundries, T&P, workers welfare, cess required for the work etc complete in all respect as per direction by the Engineer-in-Charge.	Per 1 Cum	65.33	428.79	Rupees Four Hundred twenty eight & paise Seventy nine only	28012.00
3	Providing and laying plain cement concrete of proportion(1:3:6) in foundation and floors using 4 cm, size black hand broken granite stone metal and screened and washed sharp sand for mortar of approved quality and from approved quarry including hoisting, lowering, laying concrete ramming, watering and curing etc. complete to required levels laid in layers not exceeding 15cm thick in each layer including cost, conveyance, royalties, taxes of all materials and cost of all labours, T&P workers welfare, cess etc required for the work including shoring, shuttering and dewatering if required including hire & running charges of all machineries required for the work etc complete as per the direction of the Engineer-in-Charge.	Per 1 Cum	55.04	4385.72	Rupees Four Thousand Three Hundred Eighty five & Paise Seventy two only	241390.00
4	Brick Masonry work with Fly Ash brick of size 25 cm. X 12 cm. X 8 cm. having crushing strength not less than 75 kg per sqr Cm. in cement mortar of mix (1.6) with screened & washed sand for mortar after immersing the bricks for 6 (Six) hours in water before use in foundation and plinth including splays cutting, circular moulding, corbelling, chamfering and similar such type of works, watering and curing etc. including cost, conveyance, loading, unloading, royalties and taxes of all materials, cost of all labour, scaffolding, sundries, T&P, workers welfare, cess required for the works etc. Complete in all respect as directed by the Engineer-in-Charge.	Per 1 Cum	40.54	4332.64	Rupees Four Thousand Three Hundred thirty two & paise Sixty four only	175645.00
5	Cement Concrete (1:1.5:3) with 12 mm size crusher broken hard granite chips for C.C. works including hoisting and laying etc. Complete with all charges.	Per 1 Cum	46.98	6777.00	Rupees Six Thousand Seven hundred Seventy Seven only	318383.00
6	Supplying, fitting and placing uncoated HYSD bar reinforcement as per drawing and technical specification including cost, conveyance and all taxes of steel and binding wire etc. complete with all charges.	Qntl	51.67	5398.28	Rupees Five Thousand Three hundred ninety eight & paise Twenty eight only	278929.00
7	Rigid and smooth centring and shuttering for R.C.C works including false works and dismantling them after required period of casting including cost of all materials, labour, workers welfare, cess required for the work complete as directed by Engineer-in-Charge.					
	(a) Column Footing & plinth	Per 1 Cum	69.03	100.11	Rupees One hundred & paise eleven only	6910.00

	(b) Lintel	Per 1 Cum	55.53	259.11	Rupees Two Hundred fifty nine & paise eleven only	14388.00
	(c) Column & beams	Per 1 Cum	58.29	714.95	Rupees Seven Hundred fourteen & paise ninety five only	41674.00
	(d) Roof Slab & Chajja	Per 1 Cum	101.25	420.04	Rupees four hundred twenty & paise four only	42529.00
8	20mm. thick cement plaster in c.m. 1:4 over roof as grading including cost conveyance of materials curing etc. complete. With all charges.	Per 1 Sqm	112.11	218.82	Rupees two hundred eighteen & paise eighty two only	24532.00
9	Providing 12mm thick cement plaster to the outside surface of Brick masonry wall with cement mortar (1.6) including racking out joints, Scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and levels as per drawings including cost of all materials, Conveyance, loading and unloading, all taxes and royalties, all labour ,scaffolding, watering and curing, sundries and T&P, workers welfare, cess etc. complete as per direction of the Engineer-in-Charge.	Per 1 Sqm	122.09	139.50	Rupees one hundred thirty nine & paise fifty only	17032.00
10	Providing 16mm thick cement plaster with punning for dado and skirting to the inside surface of Brick masonry work with cement mortar (1.6) including racking out joints, scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and level as per drawings including cost of all materials, conveyance ,loading and unloading, all taxes and royalties ,all labour, scaffolding, watering and curing, sundries and T&P, workers welfare, cess etc. complete as per specification and direction of the Engineer-in-Charge.	Per 1 Sqm	401.99	197.59	Rupees One hundred ninety seven & paise fifty nine only	79429.00
11	20mm. thick cement plaster in c.m. 1:4 over Stone Masonry including cost conveyance of materials curing etc. complete with all charges.	Per 1 Sqm	14.49	208.35	Rupees Two Hundred eight & paise thirty five only	3020.00
12	6mm. thick cement plaster (1:4) to R.C.C. surfaces finished smooth including closed deep chipping and slury treatment, cost & conveyance of materials curing etc. completewith all charges.	Per 1 Sqm	11.64	145.05	Rupees One hundred forty five & paise five only	1689.00
13	10cm dry epidorite metal or any other hard metal 4cm size metal of 4cm. Size well watered & rammed to receive A.S flooring with all charges. Ccomplete.	Per 1 Sqm	83.44	317.98	Rupees Three Hundred seventeen & paise ninety eight only	26532.00
14	Supplying, fitting and fixing vetrified tiles of 8mm to 10mm thickness of marbonite or equivalent made in floors or Treads in 25mm thick Bed of CM (1:1) jointing with neat and cement slury mixed with pigment to match the shade of the tiles etc. complete with all cost, conveyance, taxes of all materials, labour, T&P, workers welfare ,cess etc required for the work complete in all respect.	Per 1 Sqm	92.94	1192.14	Rupees One Thousand one hundred ninety two & paise fourteen only	110797.00
15	Providing, fitting and fixing of pre cast glazed ceramic wall tiles of approved quality, thickness and sizes in dadoes (1:3) jointed with neat cement slurry mixed with pigments to match the shade of the tiles including finished smooth, watering, curing with cost conveyance, royalties taxes of all materials, all labour, T& P, workers welfare, cess required of Engineer in -charge.	Per 1 Sqm	48.25	1037.13	Rupees One thousand thirty seven & paise thirteen only	50040.00
16	Finishing walls with water proofing cement paint of approved shade on new work two coats to give an even shade including cost of paint etc. complete with all Labour T&P , workers welfare, Cess etc. complete with all charges.	Per 1 Sqm	59.44	47.74	Rupees Forty seven & paise seventy four only	2838.00
17	Distempering two coats to wall with distemper of approved shade on new work to give an even shade including cost of distemper all labour, scaffolding, sundries, brushes and T&P, Workers Welfare ,Cess etc. complete as per specification and direction of the Engineer-in-charge.	Per 1 Sqm	59.44	65.38	Rupees Sixty five & paise thirty eight only	3886.00

18	Painting two coats with any approved enamel paint over a coat of red oxide primer to Door & Window including cost of paint, primer sand papering polishing the surface with cost conveyance taxes of all materials and labour with T&P, Workers Welfare ,Cess required for the work etc. complete in all respect.	Per 1 Sqm	98.23	188.16	Rupees One hundred Eighty eight & paise Sixteen only	18483.00
19	Supplying fitting and fixing of M.S grills ,MS door, M.S gates shutters of approved quality and design to windows and openings and stair case railing and parapet railing etc made of M.S flat, Angle, sheets in proper position including making holes in walls RCC structure and wood work etc and making good to the damages to walls or R.C.C structure including mending or cutting to sizes or grooved in walls and fixing with R.C.C (1:2:4) with hard black broken granite stone chips of 12mm to 20mm (1/2" to 3/4") (20mm not exceed 25%)with cost and conveyance of all materials, labour taxes and royalties with all T&P, workers welfare, cess etc. complete with all charges.	One Kg	1956.01	75.00	Rupees seventy five only	146701.00
20	Supplying & fixing in position 50mm thick precast C.C jally (1:2:4) & finishing in cm (1:3) including cost of all materials, labours, transportation T&P work welfare, Cess and all taxes etc complete.	Per 1 Sqm	1.11	317.31	Three hundred seventeen & paise thirty one only	352.00
21	Cost of const. Of Display board including cost of painting & writing complete with all charges. Size= (4'x0.83'x5')	Each	1 No	4000.00	Four thousand only	4000.00
22	Supplying, fitting and fixing of Stainless steel of 304 grade in hand railing using 50mm dia of 2mm thick circular pipe with Balustrade of size 32mmx32mmx2mm @ 0.90 mtr C/C and stainless square pipe bracing of size 32mmx32mmx2mm in 3 rows in stair case as per approved design and specification, buffing, polishing etc with cost, conveyance, taxes of all materials, labour T&P, workers welfare ,Cess etc required for the work complete in all respect.	Per 1Kg	300kg (Approx.)	100.00	One hundred only	30000.00
[Twenty two items] only		Total Tender Amount = Rs.				1679055.00

(Rupees Sixteen Lakh Seventy Nine thousand Fifty

five) only

[Signature]
Junior Engineer
Daringbadi Block
20/11/2020

[Signature]
Assistant Executive Engineer
Daringbadi Block
20/11/2020

[Signature]
Block Development Officer
Daringbadi Block
20/11/20

Approved

[Signature]
Additional Project Director (Technical)
DRDA Kandhamal

Rate Quoted by me is

SL No	Percentage	In Figure	In Words
1	2	3	4
1	% Less		
2	% Excess		
3	Schedule of Rate		

Signature of Tenderer