


The Panchayat Samiti, Daringbadi on behalf of Govt. of Odisha invites percentage rate bids to be received in the Office of the under signed for the works given below. The details of bid documents will be available in the [www. Kandhamal.nic.in](http://www.Kandhamal.nic.in) website and also in the office of the Block Development Officer, Daringbadi from 7:00 AM to 1:00PM on date from 01.05.2021 to 25.05.2021. Bid documents shall be dropped in the tender Box placed in the Office chamber of Block Development Officer, Daringbadi on or before 1:00PM of Date. 25.05.2021 and shall be opened at 2:00PM of Date 25.05.2021 in the office of the Panchayat Samiti, Daringbadi. Further details can be seen from the website [www. Kandhamal.nic.in](http://www.Kandhamal.nic.in).

SL No	Name of the works	Name of the Tendering Authority	Value of works	Bid Security in Rs.	Tender Paper Cost	Class of Contractor	Period of completion
1	2	3	4	5	6	7	8
1	Construction of Sub-Centre Building Kattingia-2 under Daringbadi Block	B.D.O, Daringbadi	Rs.16,31,789/-	Rs.16,320/-	Rs.6000/-	D-Class	06 Months
2	Construction of Sub- Centre Building Daringbadi under Daringbadi Block	B.D.O, Daringbadi	Rs.16,79,055/-	Rs.16,790/-	Rs.6000/-	D-Class	06 Months
3	Construction of Labour Room Building at PHC (N) Bamunigam under Daringbadi Block	B.D.O, Daringbadi	Rs.23,40,216/-	Rs.23,400/-	Rs.6000/-	C-Class	06 Months
4	Construction of Labour Room Building at PHC (N) Budaguda under Daringbadi Block	B.D.O, Daringbadi	Rs.23,40,216/-	Rs.23,400/-	Rs.6000/-	C-Class	06 Months
5	Construction of CDPO New Office Building at Daringbadi	B.D.O, Daringbadi	Rs.21,25,393/-	Rs.21,250/-	Rs.6000/-	C-Class	06 Months


Block Development Officer
Daringbadi


Memo No. 1467 /Date. 28/04/2021,

Copy forwarded to the Editor DHARITRI ,BBSR / PRAMEYEA ,BBSR/ SAMBAD ,BBSR for information with a request to get it published in the shortest space possible at an early date before 30.04.2021 under Rs. 10,000/- for wide circulation of Tender call notice. The complimentary copy of the news paper containing Tender call notice may be sent to this Office for reference & record.


Block Development Officer
Daringbadi


Memo No. 1468 /Date. 28/04/2021 /

Copy Submitted to the Collector & District Magistrate, Kandhamal, Phulbani for favour of kind information.


Block Development Officer
Daringbadi


Memo NO. 1469 / Date. 28/4/2021 /

Copy to the Project Director, DRDA, Kandhamal/ Sub-Collector ,Balliguda/ Sub- Collector ,Phulbani/ Executive Engineer R&B/ RWSS/ MI/RD ,Balliguda & Phulbani/ DSWO, Kandhamal/ Chief District Medical and PHO, Kandhamal/ CDPO, Daringbadi/ DI & PRO, Phulbani for information & wide circulation with a request to display the Tender call notice in their notice Board.

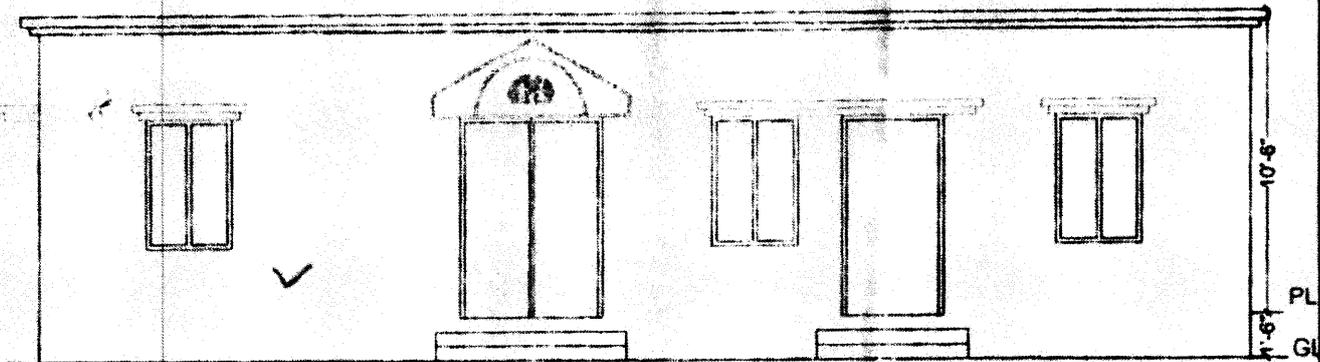

Block Development Officer
Daringbadi

Memo No. 1470 / Date. 28/04/2021 /

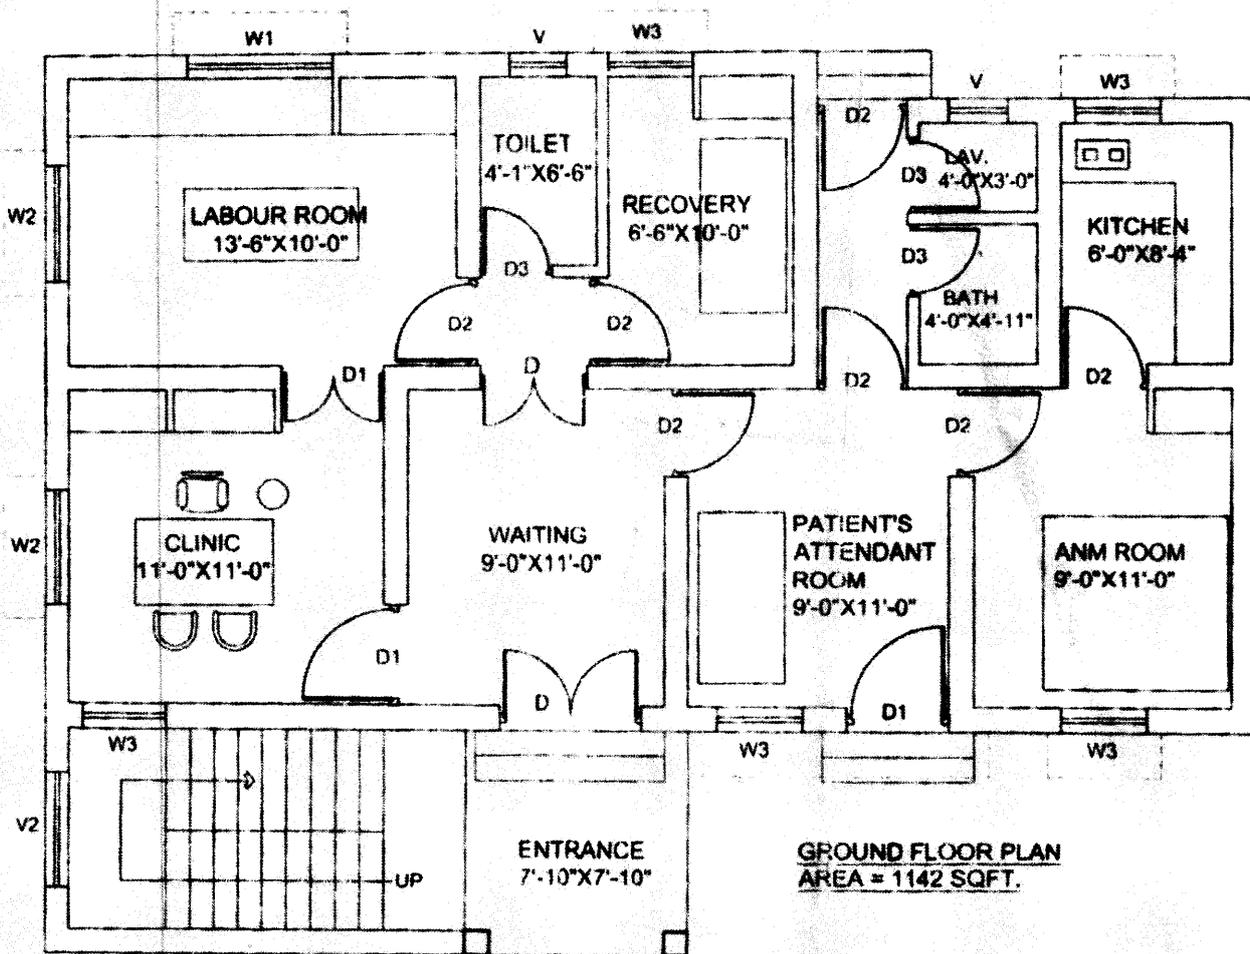
Copy forwarded to the DIO, NIC, Kandhamal for information & necessary action. He is requested to publish the Tender call notice with Plan and Specifications (Approved Tender Scheduled) on Govt. website for wide publicity before 30.04.2021.


Block Development Officer
Daringbadi

PLAN OF SUBCENTRE



FRONT ELEVATION



GROUND FLOOR PLAN
AREA = 1142 SQFT.

DRG. TITLE :

ARCHITECTURAL PLAN, ELEVATION &
LAYOUT PLAN OF SUBCENTRE.

SCHEDULE OF DOORS AND WINDOWS

TYPE	SIZE	DESCRIPTION
D	5'-0" x 7'-0"	MS Grill
D	3'-9" x 7'-0"	Panelled door
D1	3'-6" x 7'-0"	-do-
D2	3'-0" x 7'-0"	-do-
D3	2'-6" x 7'-0"	PVC Door
W1	5'-0" x 4'-6"	MS Window shutter
W2	4'-0" x 4'-6"	-do-
W3	3'-0" x 4'-6"	-do-
V	2'-0" x 2'-6"	Fully glazed top hung ventilator

ML
20/11/2020

TENDER SCHEDULE

1. Name of the Work:- Construction of Sub Centre Building Kattingia of Daringbadi Block for the Year-2020-21
2. Estimated cost with GST=Rs.2000000/-
3. Tender Amount =Rs. 16,31,789.00

SL No.	Description work	Unit	Qty	Rate (Rs)		Amount
				In figure	In words	
1	2	3	4	5	6	7
1	Earthwork in excavation of foundation & plinth in hard soil mixed with gravels including dressing and levelling the bed up to the required depth & removing the excavated earth & depositing the same away from the work site within initial lead of 50mtr & initial lift of 1.5 mtr, including cost of labour T&P, workers welfare, cess etc required for the work including shoring, shuttering propping & dewatering if required, etc. complete in all respect as per the specification & direction of the Engineer-in-Charge.	Per 1 Cum	78.90	187.81	Rupees One Hundred Eighty Seven & Eighty one Paise only	14818.00
2	Supplying and filling of sand in foundation & plinth well watered and rammed with all lead and lift including cost, conveyance, loading, unloading, royalties and taxes of all materials, cost of all labour, sundries, T&P, workers welfare, cess required for the work etc complete in all respect as per direction by the Engineer-in-Charge.	Per 1 Cum	51.88	426.00	Rupees four Hundred Twenty Six only	22101.00
3	Providing and laying plain cement concrete of proportion(1:3:6)in foundation and floors using 4 cm, size black hand broken granite stone metal and screened and washed sharp sand for mortar of approved quality and from approved quarry including hoisting, lowering, laying concrete ramming, watering and curing etc. complete to required levels laid in layers not exceeding 15cm thick in each layer including cost, conveyance, royalties, taxes of all materials and cost of all labours, T&P, workers welfare, cess etc required for the work including shoring, shuttering and dewatering if required including hire & running charges of all machineries required for the work etc complete as per the direction of the Engineer-in-Charge.	Per 1cum	22.86	4309.30	Rupees Four Thousand Three Hundred Nine & thirty Paise only	98511.00
4	RR stone masonry with CM (1.6)in foundation and plinth using HG stone of size 0.025 cum and sand of approved quarry including watering and curing and cost, conveyance, royalty of all materials, labour charges, sundries and T&P, workers welfare, cess etc complete.	Per 1 Cum	33.49	3404.86	Rupees Three thousand Four Hundred Four & Eighty Six Paise only	114029.00
5	R.C.C (M 20) using 20mm and down graded H.G crusher broken chips of approved quality and form approved quarry including hoisting, lowering, laying concrete, ramming, watering and curing etc. complete and cost, conveyance royalties and taxes of all materials, labour and T&P workers welfare cess required for the work etc complete as directed by Engineer-in-Charge.	Per 1 Cum	45.37	5207.94	Rupees Five Thousand Two Hundred Seven & Ninety Four Paise only	236284.00
Ground floor						
6	Providing, Cutting, straightening coiled or bent up Fe-415 grade steel welding or jointing if necessary, bending, binding, tying the grills as required for RCC works, and hoisting, lowering and placing in proper position according to approved designs and drawings including cost, conveyance, loading, unloading, taxes of M.S rods, Fe-415 or equivalent and binding wires of 18 to 20 gauge required for the work and cost of all labour, sundries, T&P, workers welfare, cess and scaffolding complete in all respect as directed by the Engineer-in-Charge (payment will be made according to the actual weight of M.S rod, Fe-415 or equivalent consumed in the work and no separate payment will be made towards weight of binding wires which is to be borne by the contractor at his own cost) as per the direction of	Per 1 Qtl	45.40	5345.74	Rupees Five Thousand Three Hundred Forty Five & Seventy Four Paise only	242697.00
7	Rigid and smooth centring and shuttering for R.C.C works including false works and dismantling them after required period of casting including cost of all materials, labour, workers welfare, cess required for the work complete as directed by Engineer-in-Charge.					

A	RCC work up to Plinth beam	Per 1 Sqm	68.45	106.90	Rupees One Hundred Six & Ninty Paise Only	7317.00
B	RCC work in Columns, beams	Per 1 Sqm	77.01	721.73	Rupees Seven Hundred Twenty One & Seventy Three Paise only	55581.00
C	Lintel	Per 1 Sqm	29.66	267.13	Rupees Two Hundred Sixty Seven & Thirteen Paise only	7923.00
D	Staircase	Per 1 Sqm	13.48	423.06	Rupees Four Hundred Twenty Three & Six Paise only	5703.00
E	RCC work in Slab	Per 1 Sqm	110.54	423.06	Rupees Four Hundred Twenty Three & Six Paise only	46765.00
8	Brick Masonry work with Fly Ash brick of size 25 cm. X 12 cm. X 8 cm. having crushing strength not less than 75 kg per sqr Cm. in cement mortar of mix (1.6) with screened & washed sand for mortar after immersing the bricks for 6 (Six) hours in water before use in foundation and plinth including splays cutting, circular moulding, corbelling, chamfering and similar such type of works, watering and curing etc. including cost, conveyance, loading, unloading ,royalties and taxes of all materials, cost of all labour ,scaffolding, sundries, T&P, workers welfare ,cess required for the works etc . Complete in all respect as directed by the Engineer-in-Charge	Per 1 Cum	7.24	4451.36	Rupees Four Thousand Four Hundred Fifty One & Thirty Six Paise only	32228.00
	Ground floor					
9	Brick Masonry work with Fly Ash brick of size 25 cm. X 12cm.x8cm having crushing strength not less than 75 kg. Per Sqr. Cm. in cement mortar of mix (1.6) with screened & washed sand for mortar after immersing the bricks for 6(Six)hours in water before use in superstructure including splays cutting, circular moulding ,corbelling ,chamfering and similar such type of works, watering and curing etc. including cost, conveyance, loading ,unloading ,royalties and taxes of all materials, cost of all labour, scaffolding ,sundries, T&P, workers welfare ,cess required for the works etc. complete in all respect as directed by the Engineer-in-Charge.	Per 1 Cum	35.05	4484.36	Rupees Four thousand Four Hundred Eighty Four & Thirty Six Paise only	157177.00
10	Providing 16mm thick cement plaster to the inside surface of Brick masonry work with cement mortal (1.6) including racking out joints, scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and level as per drawings including cost of all materials, Conveyance, loading and unloading, all taxes and royalties, all labour, scaffolding ,watering and curing, sundries and T&P, workers welfare, cess etc. complete as per specification and direction of the Engineer-in-Charge.	Per 1 Sqm	284.23	198.48	Rupees One Hundred Ninety Eighty & Forty Eighty Paise only	56414.00
	Ground floor					
11	Providing 12mm thick cement plaster to the outside surface of Brick masonry wall with cement mortal (1.6) including racking out joints, Scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and levels as per drawings including cost of all materials, Conveyance, loading and unloading, all taxes and royalties, all labour ,scaffolding, watering and curing, sundries and T&P, workers welfare, cess etc. complete as per direction of the Engineer-in-Charge.	Per 1 Sqm	132.01	132.69	Rupees One Hundred Thirty Two & Sixty Nine Paise only	17516.00
	Ground floor					
12	Providing 16mm thick cement plaster with punning for dado and skirting to the inside surface of Brick masonry work with cement mortar (1.6)including racking out joints, scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and level as per drawings including cost of all materials, conveyance ,loading and unloading, all taxes and royalties ,all labour, scaffolding, watering and curing, sundries and T&P, workers welfare, cess etc. complete as per specification and direction of the Engineer-in-Charge.	Per 1 Sqm	45.98	213.99	Rupees Two Hundred Thirteen & Ninety nine Paise only	9839.00
	Ground floor					

13	Supplying, fitting and fixing vetrified tiles of 8mm to 10mm thickness of marbonite or equivalent made in floors or Treads in 25mm thick Bed of CM (1:1) jointing with neat and cement slury mixed with pigment to match the shade of the tiles etc. complete with all cost, conveyance, taxes of all materials, labour, T&P, workers welfare ,cess etc required for the work complete in all respect.	Per 1 Sqm	8.19	996.57	Rupees Nine Hundred Ninety Six & Fifty Seven Paise only	8162.00
14	Supplying, fitting and fixing vetrified tiles of 8mm to 10mm thickness of marbonite or equivalent made in dadoes over 12mm thick cement plaster jointing with neat cement slushy mixed with pigment to match the shade of the tiles etc. complete with all cost, conveyance ,taxes of all materials, labour, T&P, workers welfare, cess etc .required for the work complete in all respect.	Per 1 Sqm	40.06	1056.03	Rupees One Thousand Fifty Six & Three Paise only	42305.00
15	Providing fixing and fitting with glazed rough ceramic floor tiles in floors or Treads in 25mm thick Bed of C.M (1:1) jointing with neat and cement slushy mixed with pigment to match the shade of the tiles etc complete with cost, Conveyance, royalties, taxes of all materials, including cost of all labour T&P, workers welfare ,cess required for the work complete in all respect as per direction of the Engineer-in-Charge	Per 1 Sqm	88.02	1212.40	Rupees One Thousand Two Hundred Twelve & forty Paise only	106716.00
16	Supplying, fitting and fixing vetrified tiles of 8mm to 10mm thickness of marbonite or equivalent made in dadoes over 12mm thick cement plaster jointing with neat cement slushy mixed with pigment to match the shade of the tiles etc. complete with all cost, conveyance ,taxes of all materials, labour, T&P, workers welfare, cess etc .required for the work complete in all respect.	Per 1 Sqm	21.58	1310.28	Rupees One thousand Three Hundred Ten & Twenty Eight Paise only	28276.00
17	Supplying fitting and fixing of M.S grills ,MS door, M.S gates shutters of approved quality and design to windows and openings and stair case railing and parapet railing etc made of M.S flat, Angle, sheets in proper position including making holes in walls RCC structure and wood work etc and making good to the damages to walls or R.C.C structure including mending or cutting to sizes or grooved in walls and fixing with R.C.C (1:2:4) with hard black broken granite stone chips of 12mm to 20mm (1/2" to 3/4") (20mm not exceed 25%)with cost and conveyance of all materials, labour taxes and royalties with all T&P, workers welfare, cess etc. complete in all floors.	KG	767.00	75.00	Rupees Seventy Five Only	57525.00
Ground floor						
18	Providing fitting, fixing of Al. Door with OEL anodized Al. Door section of 9201 as top member, bottom and middle member and aluminium plate board fixed on door frame by means of tapered clip No. 4660 and the frame to be completed by means of jointing angle No. 1855 including labour charges, T&P, workers welfare, Cess hire charges of drilling machine, all cost of labour, etc	Per 1 KG	257.00	76.00	Rupees Seventy Six Only	19520.00
19	Providing fitting, fixing of Al. Door with OEL anodized Al. Door section of 9202 as member, 9201 as top member and 9200 as bottom and middle member and pre-laminated board in lower part and 5 mm thick black glass in upper part fixed on door frame by 12mm thick means of tapered clip No. 4660 and the frame to be completed by means of joining angle No. 1855 including cost, conveyance, royalty, taxes of all materials, all labour, T&P, workers welfares, Cess required for the work, hire charges of drilling machine etc complete in all respect as per direction f the Engineer in -charge.	Per 1 Sqm	18.70	6890.40	Rupees Six Thousand Eight Hundred Ninety & Forty paise	128850.00
20	Painting two coats with any approved enamel paint over a coat of red oxide primer to Door & Window including cost of paint, primer sand papering polishing the surface with cost conveyance taxes of all materials and labour with T&P, Workers Welfare ,Cess required for the work etc. complete in all respect.	Per 1 Sqm	44.95	192.89	rupees One Hundred Ninety Two & Eighty Nine Paise only	8671.00

21	Priming one coat on plastered surfaces to receive welfare coat with wall cement water bound primer including cost of all materials, conveyance, loading and unloading, all taxes and royalties, all labour, scaffolding, watering and curing, sundries and T&P, Workers welfare, Cess etc. Complete as per specification and direction of the Engineer In-charge.	Per 1 Sqm	628.48	57.73	Rupees Fifty Seven & Seventy Three Paise only	36283.00
	Ground Floor					
22	Finishing wall with weather coat two coats on exposed surface including cost of all materials, conveyance, loading and unloading, all taxes and royalties, all labour, scaffolding, watering and curing, sundries and T&P, Workers Welfare ,Cess etc. complete as per specification and direction of the Engineer-in-charge.	Per 1 Sqm	157.55	74.47	Rupees Seventy Four & Forty Seven Paise only	11733.00
	Ground Floor					
23	Distemping two coats to wall with distemper of approved shade on new work to give an even shade including cost of distemper all labour, scaffolding, sundries, brushes and T&P, Workers Welfare ,Cess etc. complete as per specification and direction of the Engineer in-charge.	Per 1 Sqm	380.45	65.80	Rupees Sixty Five & Eighty Paise only	25034.00
	Ground Floor					
24	Supplying, fitting and fixing of Stainless steel of 304 grade in hand railing using 50mm dia of 2mm thick circular pipe with Balustrade of size 32mmx32mmx2mm @ 0.90 mtr C/C and stainless square pipe bracing of size 32mmx32mmx2mm in 3 rows in stair case as per approved design and specification, buffing, polishing etc with cost, conveyance, taxes of all materials, labour T&P, workers welfare ,Cess etc required for the work complete in all respect.	Per 1 Rmtr	7.62	3497.54	Rupees Three thousand Four Hundred Ninety Seven & Fifty Four Paise only	26651.00
25	Supplying and fixing of ventilator in position with cement mortar (1:3) to the line and level including cost of all materials, conveyance, loading and unloading, all taxes and royalties, all labour, scaffolding, watering and curing, sundries and T&P, workers welfare, Cess etc. complete as per specification and direction of the Engineer-in-charge.					
	Ground floor (2'0"x2'0") size	No	5.00	400.00	Rupees Four Hundred Only	2000.00
	(1'6"x1'0") size	No	18.00	120.00	Rupees One Hundred Twenty only	2160.00
26	Cost of citizen information board of brick masonry finished for painting, lettering required information including all cost of materials, labour, workers welfare, cess paint etc. complete as per direction of the Engineer-in-charge.(Size=4.0x0.83x5.0)	Each	01 No	3000.00	Rupees Three Thousand only	3000.00
	[Twenty Six] items only.					
	Total				Total Tender Amount = Rs. 16,31,789.00	


Rupees Sixteen Lacs Thirty One Thousands Seven Hundred Eighty Nine only


Junior Engineer
Daringbadi Block


Assistant Executive Engineer
Daringbadi Block


Block Development Officer
Daringbadi Block

Approved


Additional Project Director (Technical)
DRDA Kandhamal

Rate Quoted by me is

SL No	Percentage	In Figure.	In Words.
1	2	3	4
1	% Less		
2	% Excess		
3	Schedule of Rate		

Signature of Tenderer