

**Tender Call Notice No. 01****Dated.28.04.2021**


The Panchayat Samiti, Daringbadi on behalf of Govt. of Odisha invites percentage rate bids to be received in the Office of the under signed for the works given below. The details of bid documents will be available in the [www. Kandhamal.nic.in](http://www.Kandhamal.nic.in) website and also in the office of the Block Development Officer, Daringbadi from 7:00 AM to 1:00PM on date from 01.05.2021 to 25.05.2021. Bid documents shall be dropped in the tender Box placed in the Office chamber of Block Development Officer, Daringbadi on or before 1:00PM of Date. 25.05.2021 and shall be opened at 2:00PM of Date 25.05.2021 in the office of the Panchayat Samiti, Daringbadi. Further details can be seen from the website [www. Kandhamal.nic.in](http://www.Kandhamal.nic.in).

SL No	Name of the works	Name of the Tendering Authority	Value of works	Bid Security in Rs.	Tender Paper Cost	Class of Contractor	Period of completion
1	2	3	4	5	6	7	8
1	Construction of Sub-Centre Building Kattingia-2 under Daringbadi Block	B.D.O, Daringbadi	Rs.16,31,789/-	Rs.16,320/-	Rs.6000/-	D-Class	06 Months
2	Construction of Sub- Centre Building Daringbadi under Daringbadi Block	B.D.O, Daringbadi	Rs.16,79,055/-	Rs.16,790/-	Rs.6000/-	D-Class	06 Months
3	Construction of Labour Room Building at PHC (N) Bamunigam under Daringbadi Block	B.D.O, Daringbadi	Rs.23,40,216/-	Rs.23,400/-	Rs.6000/-	C-Class	06 Months
4	Construction of Labour Room Building at PHC (N) Budaguda under Daringbadi Block	B.D.O, Daringbadi	Rs.23,40,216/-	Rs.23,400/-	Rs.6000/-	C-Class	06 Months
5	Construction of CDPO New Office Building at Daringbadi	B.D.O, Daringbadi	Rs.21,25,393/-	Rs.21,250/-	Rs.6000/-	C-Class	06 Months

  
Block Development Officer  
Daringbadi


Memo No. 1467 /Date. 28/04/2021,

Copy forwarded to the Editor DHARITRI ,BBSR / PRAMEYEA ,BBSR/ SAMBAD ,BBSR for information with a request to get it published in the shortest space possible at an early date before 30.04.2021 under Rs. 10,000/- for wide circulation of Tender call notice. The complimentary copy of the news paper containing Tender call notice may be sent to this Office for reference & record.

  
Block Development Officer  
Daringbadi


Memo No. 1468 /Date. 28/04/2021 /

Copy Submitted to the Collector & District Magistrate, Kandhamal, Phulbani for favour of kind information.

  
Block Development Officer  
Daringbadi

Memo NO. 1469 /Date. 28/4/2021 /

Copy to the Project Director, DRDA, Kandhamal/ Sub-Collector ,Balliguda/ Sub- Collector ,Phulbani/ Executive Engineer R&B/ RWSS/ MI/RD ,Balliguda & Phulbani/ DSWO, Kandhamal/ Chief District Medical and PHO, Kandhamal/ CDPO, Daringbadi/ DI & PRO, Phulbani for information & wide circulation with a request to display the Tender call notice in their notice Board.

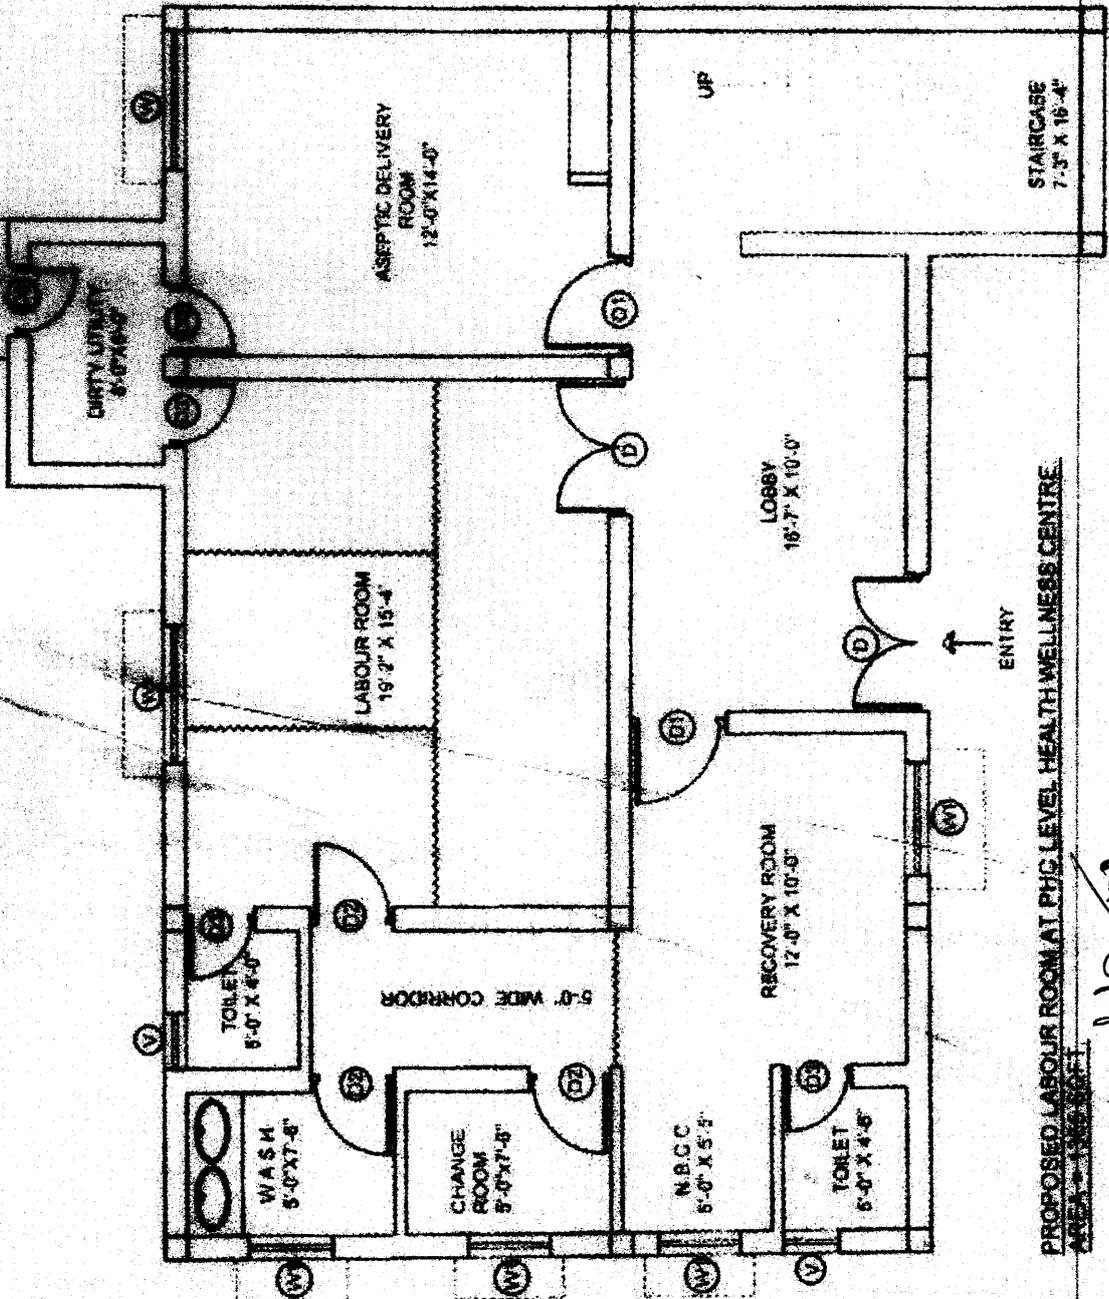
  
Block Development Officer  
Daringbadi

Memo No. 1470 /Date. 28/04/2021 /

Copy forwarded to the DIO, NIC, Kandhamal for information & necessary action. He is requested to publish the Tender call notice with Plan and Specifications (Approved Tender Scheduled) on Govt. website for wide publicity before 30.04.2021.

  
Block Development Officer  
Daringbadi

Construction of Labour Room at PHC Level.



PROPOSED LABOUR ROOM AT PHC LEVEL HEALTH WELLNESS CENTRE.  
AREA = 186 SQ FT

DRAWING TITLE	CONCEPTUAL LAYOUT PLAN OF PROPOSED LABOUR ROOM AT PHC LEVEL HEALTH WELLNESS CENTRE
SCHEDULE OF DOORS AND WINDOWS	<p><i>20/11/20</i></p> <p>D = 8'-0" X 7'-0"    W = 5'-0" X 4'-6"          C1 = 4'-0" X 7'-0"    W1 = 4'-0" X 4'-6"          D2 = 3'-4" X 7'-0"    V = 2'-0" X 3'-0"          D3 = 2'-6" X 7'-0"</p>

## TENDER SCHEDULE

1. Name of the Work:- Construction of Labour Room Building at PHC (N) Bamunigam under Daringbadi Block for the Year-2020-21

2. Estimated cost with GST= Rs.3100000/-

3. Tender Amount = Rs.23,40,216/-

SL No.	Description work	Unit	No. of Qty	Rate (Rs)		Amount
				In figure	In words	
1	2	3		4	5	6
1	Earthwork in excavation of foundation & plinth in hard soil mixed with gravels including dressing and levelling the bed up to the required depth & removing the excavated earth & depositing the same away from the work site within initial lead of 50mtr & initial lift of 1.5 mtr, including cost of labour T&P, workers welfare cess article required for the work including shoring, shuttering propping & dewatering if required, etc. complete in all respect as per the specification & direction of the Engineer-in-Charge.	Per 1 Cum	72.19	185.47	Rupees one hundred eighty five & Forty Seven Paise only	13389.00
2	Supplying and filling foundation trenches and plinth, ditches with sand well watered and rammed in layers not exceed 23.5cm(9") in depth with all lead and lift including cost, conveyance, loading, unloading, royalties and taxes of all materials, cost of all labour, sundries, T&P workers welfare cess required for the work etc complete in all respect as per direction by the Engineer-in-Charge.	Per 1 Cum	23.63	523.31	Rupees Five hundred twenty three & thirty one Paise only	12366.00
3	Providing and laying plain cement concrete of proportion(1:3:6) in foundation and floors using 4 cm, size black hand broken granite stone metal and screened and washed sharp sand for mortar of approved quality and from approved quarry including hoisting, lowering, laying concrete ramming, watering and curing etc. complete to required levels laid in layers not exceeding 15cm thick in each layer including cost, conveyance, royalties, taxes of all materials and cost of all labours, T&P workers welfare cess etc required for the work including shoring, shuttering and dewatering if required including hire & running charges of all machineries required for the work etc complete as per the direction of the Engineer-in-Charge.	Per 1 Cum	61.39	4990.43	Rupees Four Thousand Nine hundred ninety & forty three Paise only	306362.00
4	R.C.C (M 20) using 20mm and down graded H.G crusher broken chips of approved quality and form approved quarry including hoisting, lowering, laying concrete, ramming, watering and curing etc. complete and cost, conveyance royalties and taxes of all materials, labour and T&P workers welfare cess required for the work etc complete as directed by Engineer-in-Charge.	Per 1 cum	36.00	5793.26	Rupees Five Thousand Seven Hundred Ninty Three & Twenty Six Paise only	208557.00
5	Rigid and smooth centering and shuttering For RCC Works including false works and dismantalling them after casting including cost of matters.etc complete as directed by Engineer-in-Charge.					
A	RCC work up to Plinth beam	Per 1 sqm	71.64	100.01	Rupees One hundred & one Paise only	7165.00
B	Lintel	Per 1 sqm	21.88	271.11	Rupees Two hundred seventy one & Eleven Paise only	5932.00
C	RCC work in Columns, beams	Per 1 sqm	87.99	715.54	Rupees Seven Hundred fifteen & Fifty Four Paise only	62960.00

D	Chajja	Per 1 sqm	7.10	441.99	Rupees Four hundred Forty one & ninty nine Paise only	3138.00
E	Slab	Per 1 sqm	126.50	420.69	Rupees Four hundred twenty &Sixty nine Paise only	53217.00
5	RR stone masonry with CM (1.6)in foundation and plinth using HG stone of size 0.025 cum and sand of approved quarry including watering and curing and cost, conveyance, royalty of all materials, labour charges ,sundries and T&P workers welfare cess etc complete.	Per 1 Cum	65.01	4260.37	Rupees four thousand two hundred sixty &thirty Seven Paise only	276967.00
6	Brick Masonry work with Fly Ash brick of size 25 cm. X 12 cm. X 8 cm. having crushing strength not less than 75 kg per sqr Cm. in cement mortar of mix (1.6) with screened & washed sand for mortar after immersing the bricks for 6 (Six) hours in water before use in foundation and plinth including splays cutting, circular moulding, corbelling, chamfering and similar such type of works, watering and curing etc. including cost, conveyance, loading, unloading ,royalties and taxes of all materials, cost of all labour ,scaffolding, sundries, T&P workers welfare cess required for the works etc . Complete in all respect as directed by the Engineer-in-Charge.	Per 1 Cum	58.72	4760.23	Rupees Four thousand seven hundred sixty & twenty three Paise only	279521.00
7	Providing 16mm thick cement plaster to the inside surface of Brick masonry work with cement mortal (1.6) including racking out joints, scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and level as per drawings including cost of all materials, Conveyance, loading and unloading, all taxes and royalties, all labour, scaffolding ,watering and curing, sundries and T&P workers welfare cess etc. complete as per specification and direction of the Engineer-in-Charge.	Per 1 sqm	358.16	228.09	Rupees Two hundred twenty eight & zero nine Paise only	81693.00
8	Providing 12mm thick cement plaster to the outside surface of Brick masonry wall with cement mortal (1.6) including racking out joints, Scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and levels as per drawings including cost of all materials, Conveyance, loading and unloading, all taxes and royalties, all labour ,scaffolding, watering and curing, sundries and T&P workers welfare cess etc. complete as per direction of the Engineer-in-Charge.	Per 1 sqm	252.97	157.01	Rupees one hundred fifty seven &zero one Paise only	39719.00

9	Providing 20mm thick cement plaster to the outside surface of Brick masonry wall with cement mortal (1.6) including racking out joints, Scraping and cleaning the surface and finishing the plaster surface smooth using wooden floats only to proper plumbs and levels as per drawings including cost of all materials, Conveyance, loading and unloading, all taxes and royalties, all labour ,scaffolding, watering and curing, sundries and T&P workers welfare cess etc. complete as per direction of the Engineer-in-Charge.	Per 1 sqm	175.02	224.59	Rupees Two hundred twenty four & fifty nine Paise only	39308.00
10	2.5 cm thick grading concrete (1:2:2) on roof slab with 6mm size hard granite chips on new work and cost, conveyance royalties and taxes of all materials, labour and T&P workers welfare cess required for the work etc complete as directed by Engineer-in-Charge.	Per 1 sqm	128.20	328.27	Rupees Three hundred twenty eight & twenty Seven Paise only	42084.00
11	Distemping two coats to wall with distemper of approved shade on new work to give an even shade including cost of distemper all labour, scaffolding, sundries, brushes and T&P Workers Welfare Cess etc. complete as per specification and direction of the Engineer-in-charge.	Per 1 Sqm	611.13	50.22	Rupees fifty & twenty two Paise only	30691.00
12	Cost of Distemper	Per 1 ltr	171.12	51.97	Rupees fifty one & ninty seven Paise only	8893.00
13	Weather Coat two coats to walls with any approved shade including cost of materials all labour, scaffolding, sundries, brushes and T&P Workers Welfare Cess etc. complete as per specification and direction of the Engineer-in-charge.	Per 1 sqm	611.13	108.30	Rupees one hundred eight & thirty Paise only	66185.00
14	Supplying, fitting and fixing vetrified tiles of 8mm to 10mm thickness of marbonite or equivalent made in floors or Treads in 25mm thick Bed of CM (1:1) jointing with neat and cement slury mixed with pigment to match the shade of the tiles etc. complete with all cost, conveyance, taxes of all materials, labour, T&P workers welfare cess etc required for the work complete in all respect.	Per 1 Sqm	98.48	1427.29	Rupees one thousand four hundred twenty seven & twenty nine Paise only	140551.00
15	Supplying, fitting and fixing vetrified tiles of 8mm to 10mm thickness of marbonite or equivalent made in dadoes over 12mm thick cement plaster jointing with neat cement slushy mixed with pigment to match the shade of the tiles etc. complete with all cost ,conveyance ,taxes of all materials, labour, T&P workers welfare cess etc .required for the work complete in all respect.	Per 1Sqm	121.52	757.81	Rupees seven hundred fifty seven & eighty one Paise only	92089.00
16	According to approved designs and drawings including cost, conveyance, loading, unloading, taxes of M.S rods, Fe-415 or equivalent and binding wires of 18 to20 gauge required for the work and cost of all labour, sundries, T&P workers welfare cess and scaffolding complete in all respect as directed by the Engineer-in-Charge (payment will be made according to the actual weight of M.S rod,Fe-415 or equivalent consumed in the work and no separate payment will be made towards weight of binding wires which is to be borne by the contractor at his own cost)as per the direction of	Per 1 Qntl	36.00	519.14	Rupees five hundred ninteen &forteen Paise only	18689.00
17	Cost of MS Rod	Per 1 Qtl	32.40	4800	Rupees Four thousand eight hundred only	155520.00

18	Providing and fixing of swing door of approved make to be fabricated from roll formed section made of pre-painted steel (base steel as per IS-513 OF 0.8mm thick "D" Quality, galvanized as per IS -277 With zinc of 120gm/sqmtr) with paint specification being with primer of 5-7micron and finished paint with polyester paint (Black/pearl white/ chocolate brown) of 12-16 microns along with the alkyd backer at the black of 5-7 microns and the sizes of outer frame being of 33x57mm and shutter being of 46x52mm and 46x46mm and lock rail should be of 23x130mm. accessories/gaskets are to be used as per the manufacturer's supply and specification like handle, lock and floor spring of EPDM. All corner brackets are to be made of CRCA With zinc phosphating. the sections are to be cut to length, mitre joined with corner bracket and frames are fixed to the concrete/masonry walls by means of self expanding screw and glass to be used of 6mm clear with all taxes.	Per 1 Sqm	57.33	5993.81	Rupees five thousand nine hundred ninety three & eighty one Paise only	343625.00
19	Supplying fitting and fixing of M.S grills, MS door, M.S gates shutters of approved quality and design to windows and openings and stair case railing and parapet railing etc made of M.S flat, Angle, sheets in proper position including making holes in walls RCC structure and wood work etc and making good to the damages to walls or R.C.C structure including mending or cutting to sizes or grooved in walls and fixing with R.C.C (1:2:4) with hard black broken granite stone chips of 12mm to 20mm (1/2" to 3/4") (20mm not exceed 25%) with cost and conveyance of all materials, labour taxes and royalties with all T&P workers welfare cess etc. complete in all floors.	Kg	621.27	75	Rupees seventy five only	46595.00
20	Cost of citizen information board of brick masonry finished for painting, lettering required information including all cost of materials, labour, workers welfare, cess paint etc. complete as per direction of the Engineer-in-charge. (Size=4.0x0.83x5.0)	Each	1 No	5000	Rupees five thousand only	5000.00
[Twenty ] items only.						
Total		Total Tender Amount = Rs.				2340216.00

Rupees Twenty three Lakhs Forty Thousand Two hundred Sixteen only

  
Junior Engineer  
Daringbadi Block

  
Assistant Executive Engineer  
Daringbadi Block

  
Block Development Officer  
Daringbadi Block

Approved

  
Additional Project Director (Technical)  
DRDA Kandhamal

Rate Quoted by me is

SL No	Percentage	In <del>Figure</del> <sup>Figure</sup>	In <del>figure</del> <sup>figure</sup> words .
1	2	3	4
1	% Less		
2	% Excess		
3	Schedule of Rate		

Signature of Tenderer